



NEW .032" BARREL STYLE ALUMINUM TILE



Florida Product Approved No. FL16317

.032" Barrel Style Aluminum Tile is the industry's strongest Aluminum Tile Roofing System.

Uniquely designed to achieve a UL-580 Uplift Pressure of -127.5 PSF in the field.

Meets 2010 FBC for 200 MPH

Full Warranties for Coastal Applications


7788 Central Industrial Drive • Suite #3 • Riviera Beach • Florida • 33404

Phone 561.863.3677 • Fax 561.863.3675

Email: sales@fmrp.net

www.fmrp.net

.032" Aluminum Tile Panels have a 27-inch coverage width and are manufactured in lengths up to 8'-6". Material Handling is a breeze!

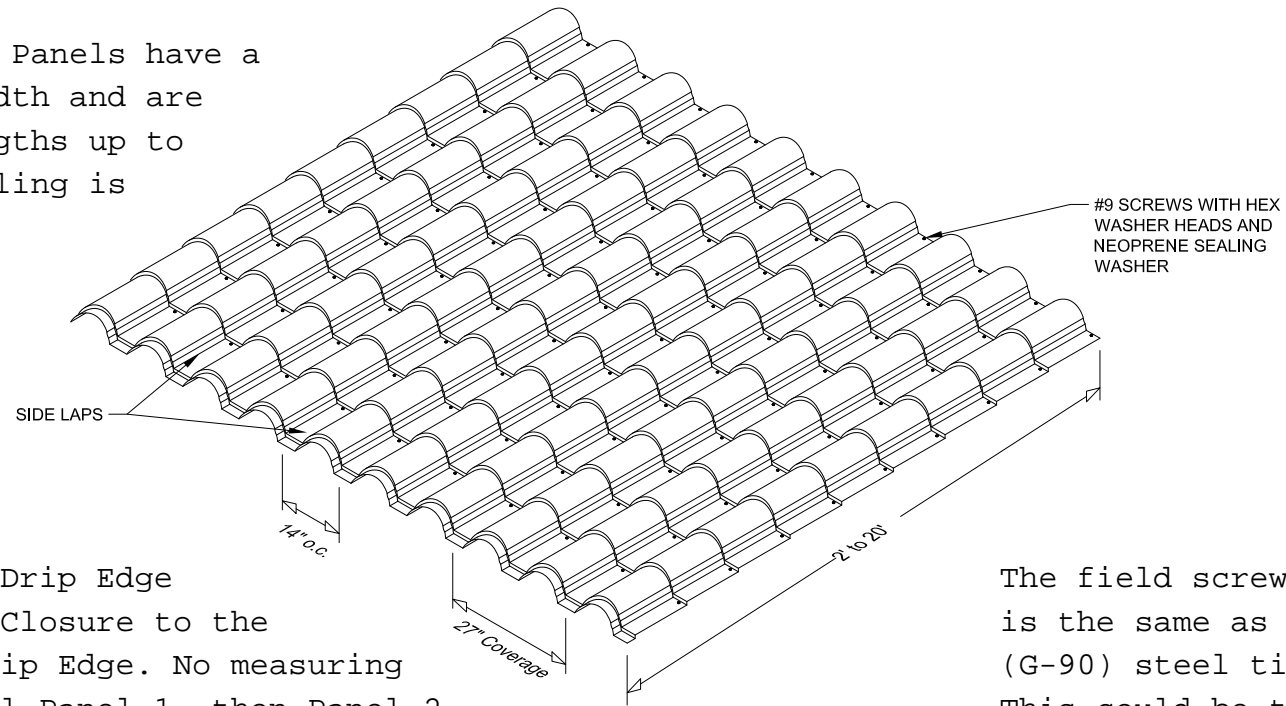

Install the 4-inch Drip Edge and align the Eave Closure to the back edge of the Drip Edge. No measuring is required. Install Panel 1, then Panel 2 by placing over the Eave Closure and pushing up to the Drip Edge. Apply 2 rows of Ultra 1000 to the valleys of each installed panel. Panel 3 installs on top of Panels 1 & 2. End-lapped panels are installed by off-setting 1 corrugation, creating a checkerboard effect. ALL ATTACHMENTS ARE FIELD SCREWS - NO SIDE-LAPS.

The field screw pattern is the same as our 24-gauge (G-90) steel tile system. This could be the easiest roofing system you have ever installed.

